

SGRP10

Product Description

Premier SGRP10 is a high performance strip sealant laminated to a clear tear resistant film for use as a dual-purpose air seal and moisture barrier tape.


For information on available sizes, please visit our website.

Typical Applications

- Creating moisture vapour seals along side lap joints of metal liner panels in the construction of buildings.

Product Benefits

- Low moisture vapour transmission rate
- Excellent movement accommodation
- Self wound on the roll for ease of application
- Conforms with the recommendations of the MCRMA Technical Paper No 14, Guidance for the Design of Metal Roofing & Cladding to comply with Approved Document L2:2001
- Outstanding adhesion to coated steel and aluminium sheets without the need for primers
- Can be applied to most building materials in cold conditions without reduction in long term performance provided surfaces are frost free
- Unique high tack adhesive for instant grab

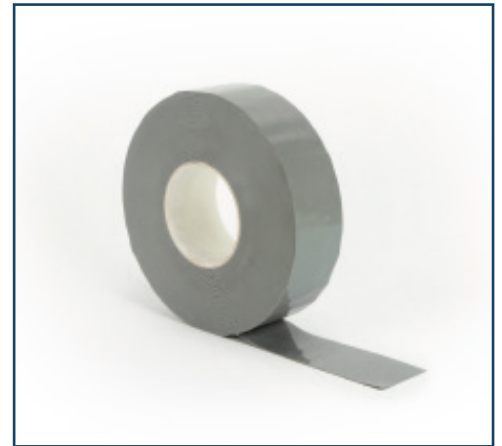

SGRP10	
Adhesion	Excellent to metals and plastics, even on cold surfaces
Compression to seal	Positive pressure
Colour	Grey
Density	1.3g/cm ³
Resistance to mould	Good
Outdoor service temperature	-20°C - +80°C
Water repellence	Excellent
Durability	25 years
Loop Tack	35N/in ²
Peel Adhesion 180 DegC	30N/in
Specific Weight	1.3g/cm ³
Staining	Nil
Tack	Excellent
UV Resistance	Very Good
Chemical resistance	Good to dilute acids & alkalis. Not recommended for extreme chemical exposure

Please note: The above technical informayion is given as a guide and is based on recent test data obtained under laboratory conditions. Materials should be fully tested by the end user to establish suitability of the product for the intended application. October 2014

Premier Sealant Systems Ltd

Mercia Way Foxhills Industrial Park Scunthorpe, DN15 8RE, England

Tel. 01724 864100 | Fax. 01724 860116 | Email. sales@premseal.co.uk | Website. www.premseal.co.uk