

SGRP10


Product Description

Premier SGRP10 is a high performance strip sealant laminated to a clear tear resistant film for use as a dual-purpose air seal and moisture barrier tape.

For information on available sizes, please visit our website.

Typical Applications

- Creating moisture vapour seals along side lap joints of metal liner panels in the construction of buildings. Not recommended for use on end laps.

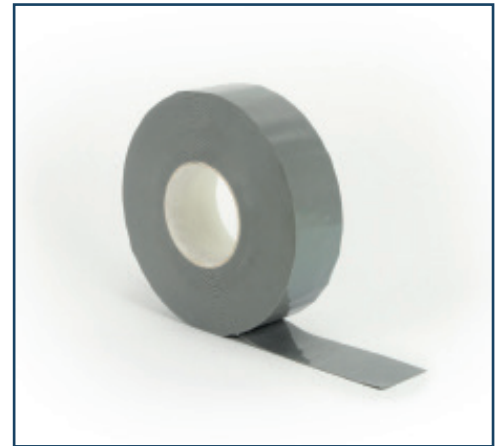

Product Benefits

- Low moisture vapour transmission rate
- Excellent movement accommodation
- Self wound on the roll for ease of application
- Conforms with the recommendations of the MCRMA Technical Paper No 14, Guidance for the Design of Metal Roofing & Cladding to comply with Approved Document L2:2001
- Outstanding adhesion to coated steel and aluminium sheets without the need for primers
- Can be applied to most building materials in cold conditions without reduction in long term performance provided surfaces are frost free
- Unique high tack adhesive for instant grab

SGRP10	
Adhesion	Excellent to metals and plastics, even on cold surfaces
Compression to seal	Positive pressure
Colour	Grey
Density	1.3g/cm
Resistance to mould	Good
Outdoor service temperature	-20°C - +80°C
Water repellence	Excellent
Durability	25 years
Loop Tack	35N/in ²
Peel Adhesion 180 DegC	30N/in
Specific Weight	1.3g/cm ³
Staining	Nil
Tack	Excellent
UV Resistance	Very Good
Chemical resistance	Good to dilute acids & alkalis. Not recommended for extreme chemical exposure

Please note: The above technical information is given as a guide and is based on recent test data obtained under laboratory conditions. Materials should be fully tested by the end user to establish suitability of the product for the intended application. October 2014

Premseal strip Butyl

Storage and Transportation Advice

STORAGE TEMPERATURE: between 5 °C and 25 °C Ambient

TRANSPORT TEMPERATURE: between 5 °C and 25 °C Ambient

LOADING/UNLOADING TEMPERATURE: Ambient

VISCOSITY (cSt): Not Applicable

STORAGE/TRANSPORT PRESSURE (kPa): Atmospheric

ELECTROSTATIC ACCUMULATION HAZARD? No, not from product, slight static charge may be developed from the removal of the release paper, if relevant use appropriate grounding procedures

USUAL SHIPPING CONTAINERS: This product can be transported by shipping container. Where possible avoid any excessive heat and prolonged exposure. Continuous exposure may impact on ease of application. Supplied in cardboard cartons.

MATERIALS AND COATINGS UNSUITABLE: None

STORAGE / HANDLING, GENERAL NOTES: Store in a cool, well-ventilated place away from incompatible materials. Do NOT remove release liner or store cartons of product near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. Shelf life more than 24 months in ambient conditions.

Storage temperatures between 5 °C and 25 °C would be advisable however storage outside of these temperatures is possible hence the terms cool and ambient.

The key to keeping material fit for purpose is to keep it dry.

IF STORAGE AND TRANSPORTATION IS BELIEVED TO BE BEYOND THESE CONDITIONS PLEASE CONTACT US TO DISCUSS FURTHER



Premier Sealant Systems Ltd.

T 01724 864 100 | E sales@premseal.co.uk | www.premseal.co.uk

Mercia Way, Foxhills Industrial Park, Scunthorpe, DN15 8RE
Registered Office: 19 Titan Court, Luton, LU4 8LL | Registered in Cardiff No. 3000843